




Xili Bearing Co., Ltd

90 mm x 160 mm x 40 mm FAG 2218-K-TVH-C3 + H318 self aligning ball bearings

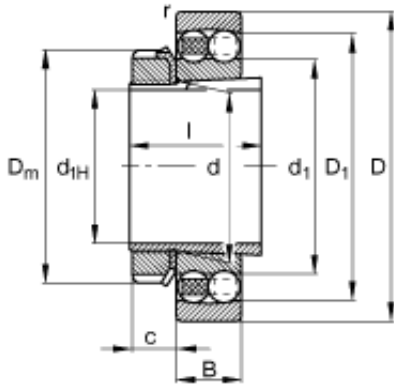

2218-K-TVH-C3 + H318 Bearing 2D drawings and 3D CAD models

Bearing No. 2218-K-TVH-C3 + H318

Size	80x160x40 mm
Bore Diameter	80 mm
Outer Diameter	160 mm
Width	40 mm
d_{1H}	80 mm
D	160 mm
B	40 mm
$B_{a \min}$	10 mm
c	18 mm
D_1	139,4 mm
$D_{a \max}$	149 mm
D_m	120 mm
d	90 mm
d_1	111,5 mm
$d_{a \max}$	101 mm
$d_{b \min}$	96 mm
l	65 mm
$r_{a \max}$	2 mm
	H318 / Adapter sleeve
m	3,18 kg / Weight
m_1	1,39 kg / Weight, adapter sleeve
C_r	71000 N / Dynamic load rating (radial)
e	0,27



Xili Bearing Co., Ltd

Y_1	2,33
Y_2	3,61
C_{0r}	28500 N / Static load rating (radial)
Y_0	2,44
n_G	4300 1/min / Limiting speed
n_B	5700 1/min / Reference speed
C_{ur}	1580 N / Fatigue limit load, radial