




Xili Bearing Co., Ltd

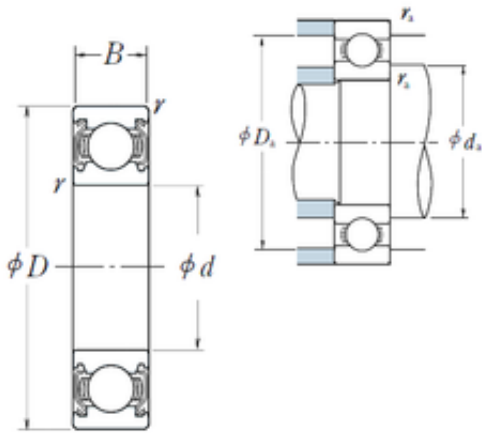

NSK 6000zz Bearing

Bearing No. 6000zz

Size	10x26x8 mm
Bore Diameter	10 mm
Outer Diameter	26 mm
Width	8 mm
d	10 mm
D	26 mm
B	8 mm
C	8 mm
r min.	0,3 mm
da min.	12 mm
da max	13 mm
Da max.	24 mm
ra max.	0,3 mm
Weight	0,018 Kg
Basic dynamic load rating (C)	4,55 kN
Basic static load rating (C0)	1,97 kN
(Grease) Lubrication Speed	30 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NSK
Minimum Buy Quantity	N/A
Weight / Kilogram	0.02
EAN	0029176012211
Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0

6000zz Bearing 2D drawings and 3D CAD models



Xili Bearing Co., Ltd

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	10MM Bore; 26MM Outside Diameter; 8MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.nskamericas.com
Manufacturer Item Number	6000ZZ
Weight / LBS	0.04
Outer Race Width	0.315 Inch 8 Millimeter
Outside Diameter	1.024 Inch 26 Millimeter
Bore	0.394 Inch 10 Millimeter
SRI	2.46
hidYobi	6000ZZ
LangID	1
D_	26
SREX	0.015
B_	8
da min	12



Xili Bearing Co., Ltd

hidTable	ecat_NSRDGB
SRE	2.67
mass	0.018
GRS rpm	30000
ra	0.3
SRIX	0.015
D_a	24
SRIN	-0.015
C0	1.97
fo	12.4
SREN	-0.015
DE_	22.762
Prod_Type3	DGBB_SR_ZZ
DA_	4.762
bomp	0
Z_	7
yobi	6000ZZ
C_conv	4550
ALPHA_	0
SDM_	18
r	0.3
KBRG	6141
SBRG	10
DI_	13.238